


BWS Weighing Indicator

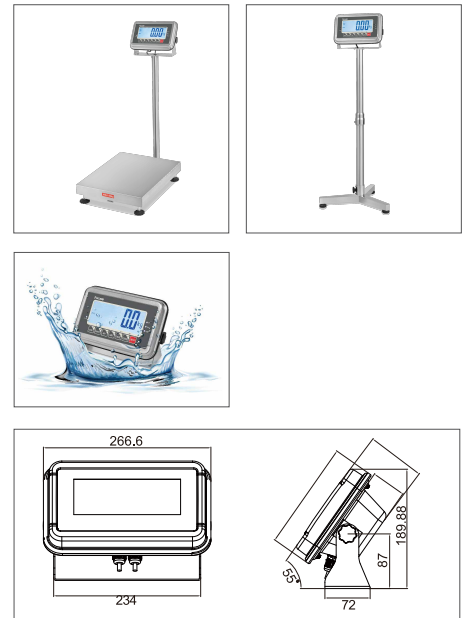

Features

Stainless steel display device with IP67 protection and superior display size

Flexible positioning, e.g. free-standing or mounted to the wall

Full function: unit change, accumulation, checkweighing, simply counting, Gross/Net shift.

Weighing with tolerance range (check-weighing): a visual and audible signal helps with portioning, dispensing or grading

Hold function: When the weighing conditions are unstable, a stable weight is calculated determining an average value

RS-232 interface can connect to PC or printer.

Technical Data

Display: LCD display, digit height 52 mm. with white color LED backlight

Power: AC adapter (12V500mA), rechargeable battery (lead acid battery 6V/4Ah), operation time 70 hours

Operation temperature: -10°C/40°C

Accessories

- Mini printer
- Label printer
- Bluetooth 5.0 data transfer to PC or tablets, Analogue output 4~20mA
- 3 color light tower

- Connection parts to install on pole for platform scale
- RS-232 cable for PC
- RS-232 cable for printer

Standard



Factory Option



Model	BWS
Housing	Stainless steel
Dimensions	266x172x189 mm
Net weight	2.5kg
nmax.	7.500e
Load cell input resistance	43~1600 ohms
Load cell excitation voltage	5VDC
Vmin(only for approval)	0.5uV
Cable length	461m/mm ²
Load cell connector	Air connector, 7pin for EC type approved model.